Heritage™ 2" Cordless Aluminum Blinds

PRODUCT SPECIFICATIONS

Tilter shall be a snap-in component incorporating a worm and pulley of low-friction thermoplastic and a nylon gear.

Tilt Rod shall be electro-zinc coated solid steel.

Tilt Wand shall be clear polycarbonate with a hexagonal cross section measuring approximately 5/16" diameter and attached to the tilter shaft by means of a polycarbonate hook for easy removal.

Drums shall be made of high-strength thermoplastic, which securely anchors braided ladders.

Installation Brackets shall be made of phosphate-treated steel with a urethane primer and polyester-baked enamel finish to match headrail. The design shall incorporate a hinged front cover.

Braided Ladder shall be made of 100% polyester yarn, incorporating two extra-strength rungs per ladder for slat support. Standard ladder spacing shall be 44 mm.

Slats shall be 5000 series cold-rolled aluminum containing the maximum allowable recycled content to produce a high-strength and corrosion-resistant flexible product. Slats shall be nominally 2" wide x .008" thick and processed to provide a smooth, hard, less porous surface with antistatic performance to repel dust. Slats shall be treated with a topcoat of low HAP polyester-baked enamel.

Bottomrail shall be C-shaped 9/16" high x 2" wide x 0.40" thick anodized aluminum. It shall be fully enclosed with a dust cover slat and finished with a polyester-baked enamel to match headrail.

OPTIONS

- Cordless lift or Tilt only
- Inverted slats
- Ring tilt
- Extension brackets
- Hold down brackets
- Cut-outs (Tilt only)
- Deluxe channel panel valance

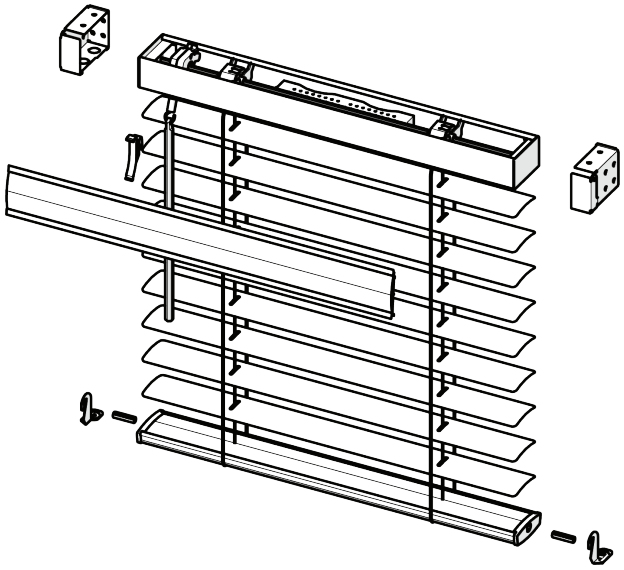

PRODUCT FEATURES AND BENEFITS

- Enclosed bottomrail
- Box bracket
- Compliant with ANSI/WCMA A100.1-2022 Standard
- Antistatic performance to repel dust
- Low HAP, low VOC paint process
- Slats meet NFPA 701
- Limited lifetime warranty