2" Cordless Faux Wood Blinds

PRODUCT SPECIFICATIONS

Headrail for Cordless Lift Blind shall use 2.00” high x 2.25”wide x 0.022” thick U-shaped steel. Rail to be primed on inside and painted per chosen color specification on outside.

Valance choices include 3" Classic and 3" Majestic.

Tilt rod shall be electro-zinc coated solid steel measuring ¼" square.

Cradles shall be made of low-friction thermoplastic with metal lift cord rollers.

Drums shall be made of high-strength thermoplastic, which securely anchors braided ladder or cloth tapes.

Braided ladder shall be made of 100% polyester yarn, incorporating four extra-strength rungs per ladder for slat support. Standard ladder spacing shall be 44 mm.

Installation brackets shall be a universal style with hinged front cover, made of phosphate-treated steel with urethane primer and polyester-baked enamel finish to match headrail.

Slats shall be rigid, UV-stabilized, flat PVC nominally 2" wide x 1/8" thick with straight-cut edges. Slats meet the requirement of NFPA 701 Test Method 1-2004 edition.

Bottomrail shall be extruded foam PVC 9/16" high x 2" wide in a rectangular shape and shall coordinate with slats.

OPTIONS

- 2½" slat
- Cordless lift
- Ring tilt (2" only)
- Extension brackets
- Hold down brackets
- Cut-outs (available on Tilt only/No Lift)

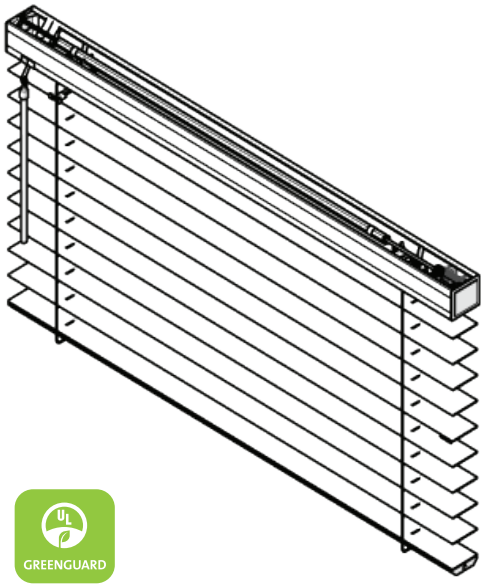

GREENGUARD

PRODUCT FEATURES AND BENEFITS

- Flat PVC slats meet NFPA 701
- Rectangular-shaped bottomrail
- Wand tilt
- Braided ladder
- Compliant with ANSI/WCMA A100.1-2022
- GREENGUARD Gold certified
- Limited lifetime warranty