2" Cordless Wood Blinds

PRODUCT SPECIFICATIONS

Headrail for Cordless Lift Blind shall use 2.00” high x 2.25”wide x 0.022” thick U-shaped steel. Rail to be primed on inside and painted per chosen color specification on outside.

Valance shall be lineal grained, smooth-sanded 100% North American Basswood. Valance choices include 3" Classic, 3 1/2" Craftsman, 3 1/2" Legacy, and 4 1/2" Symphony.

Tilt rod shall be electro-zinc coated solid steel measuring ¼" square.

Cradles shall be made of low-friction thermoplastic with metal lift cord rollers.

Drums shall be made of high-strength thermoplastic, which securely anchors braided ladder or cloth tapes.

Braided ladder shall be made of 100% polyester yarn, incorporating four extra-strength rungs per ladder for slat support. Standard ladder spacing shall be 44 mm.

Installation brackets shall be a universal style with hinged front cover and shall be made of phosphate-treated steel with urethane primer and polyester-baked enamel finish to match headrail.

Slats shall be made of North American hardwood, kiln-dried to a 6 – 10% moisture content to reduce possible warping. Slats shall be 2" wide x 1/8" thick.

Easy Grip Bottomrail shall be 5/8" high x 2" wide wood, shaped to improve closure and shall coordinate with slats.

OPTIONS

- 2 3/8" slat
- Cordless lift
- Ring tilt (2" only)
- Extension brackets
- Hold down brackets
- Cut-outs (available on No Lift / Tilt only)

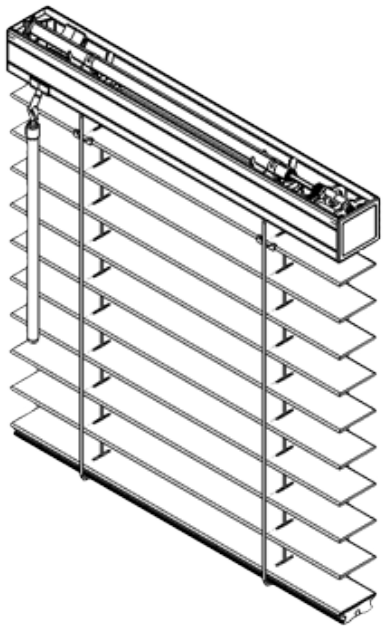

PRODUCT FEATURES AND BENEFITS

- Slats made exclusively of North American hardwood
- Easy Grip Bottomrail
- Wand tilt
- Compliant with ANSI/WCMA A100.1-2022 standard.
- Limited lifetime warranty